



LIGHT PROCESS COMPANY

1631 Gillingham Lane
Suite 100
Sugar Land, Texas 77478


phone: 888-530-3600 ~ 281-530-3600
fax: 888-530-5195 ~ 281-530-5195

www.lightprocess.com


LP11174
NEW CONSTRUCTION
NON IC



Housing Non IC G24q-3 Base
Finish 15 White
Lamp One 26w HPF Electronic **Safe Thermally Protected UL Listed for Damp Location** All Non IC Housings are not Approved for Use in Direct Contact with Insulation
Junction Box with Integral Romex Connector Quick Push and Lock Connector and Branch through Circuit Wiring with 4 in, 4 out #12 Wire, Saves Installation Time
Breakaway Flange Easy Retrofit for Use in Existing Ceilings and Remodel Applications
Housing Adjustment Housing Adjusts Vertically for Various Ceiling Thicknesses
Integral Captive Nail Nails Included for Fast Easy Installation
Adjustable Socket Plate Adjustable Socket Assembly Provides Flexibility in Lamping Options and Precise Lamp Placement with Various Trims.
Bar Hanger Bar Hangers Easily Extend and Will Not Fall Out of Plaster Flange, Providing Sturdy Installation.
Bar Hanger Locking Tabs Squeeze Tabs with  Pliers to Lock Bar Hangers into Place.
One Class P HPF Electronic Ballast ENERGY STAR® Compliant



Trims Available:

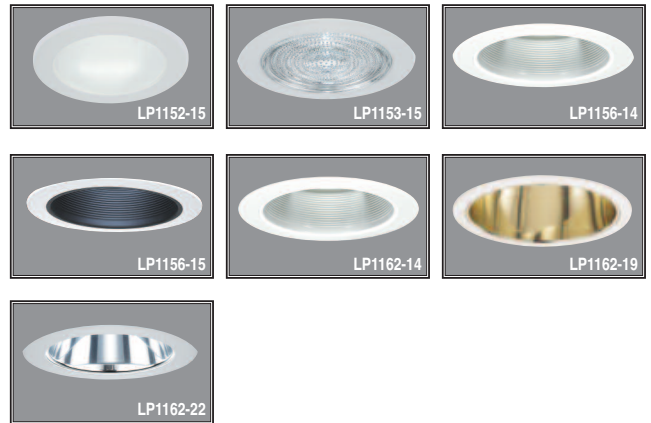

SEE TRIM PAGE FOR TRIM SPECIFICATIONS
All Products Shown Are U.L. Listed And Meet NEC When Housings And Trims Are Used As Specified

LIGHT BULB DATA

120V Compact Fluorescent

Catalog Number	Bulb Type	Base Type	Pin	Watts Rated	Rated Life (Hours)	Approx. Light (Lumen)	Approx. Color (Temp °K)	CRI
97045	Spiral	GX24q-3	4	26	10,000	1600	2,700	82
97046	Twin tube	GX24q-3	4	26	10,000	1600	2,700	82

fixture # finish lamp qty. lamp watts lamp code options

LP11174 - -

PROJECT: _____

TYPE: _____

LPC fixtures are UL listed and come with lamp and mounting hardware unless otherwise specified.